


Elbow

21.0xx PA

Elbow	Polyamide PA6 GF25
Connecting thread	Pg as per DIN 40430

Properties

Temperature range	for application in installation areas with small amounts of space due to construction dimensions
Protection grade	-20 °C +100 °C dependent on the combination with other components

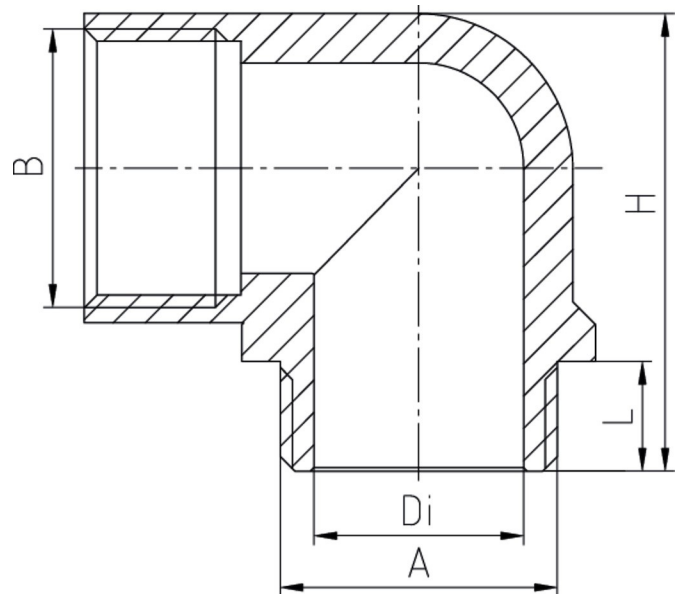

Features



RAL 7035

Connecting thread standard length

A	B	L	H	Di	VPE	Part No.
Pg 9	Pg 9	11	30	11,5	100	21.009 PA
Pg 11	Pg 11	11	33	14,5	50	21.011 PA
Pg 13,5	Pg 13,5	11,5	35,5	16	50	21.013 PA
Pg 16	Pg 16	11,5	38,5	18,5	50	21.016 PA
Pg 21	Pg 21	13	46	24	25	21.021 PA
Pg 29	Pg 29	15	59	32	10	21.029 PA