




Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

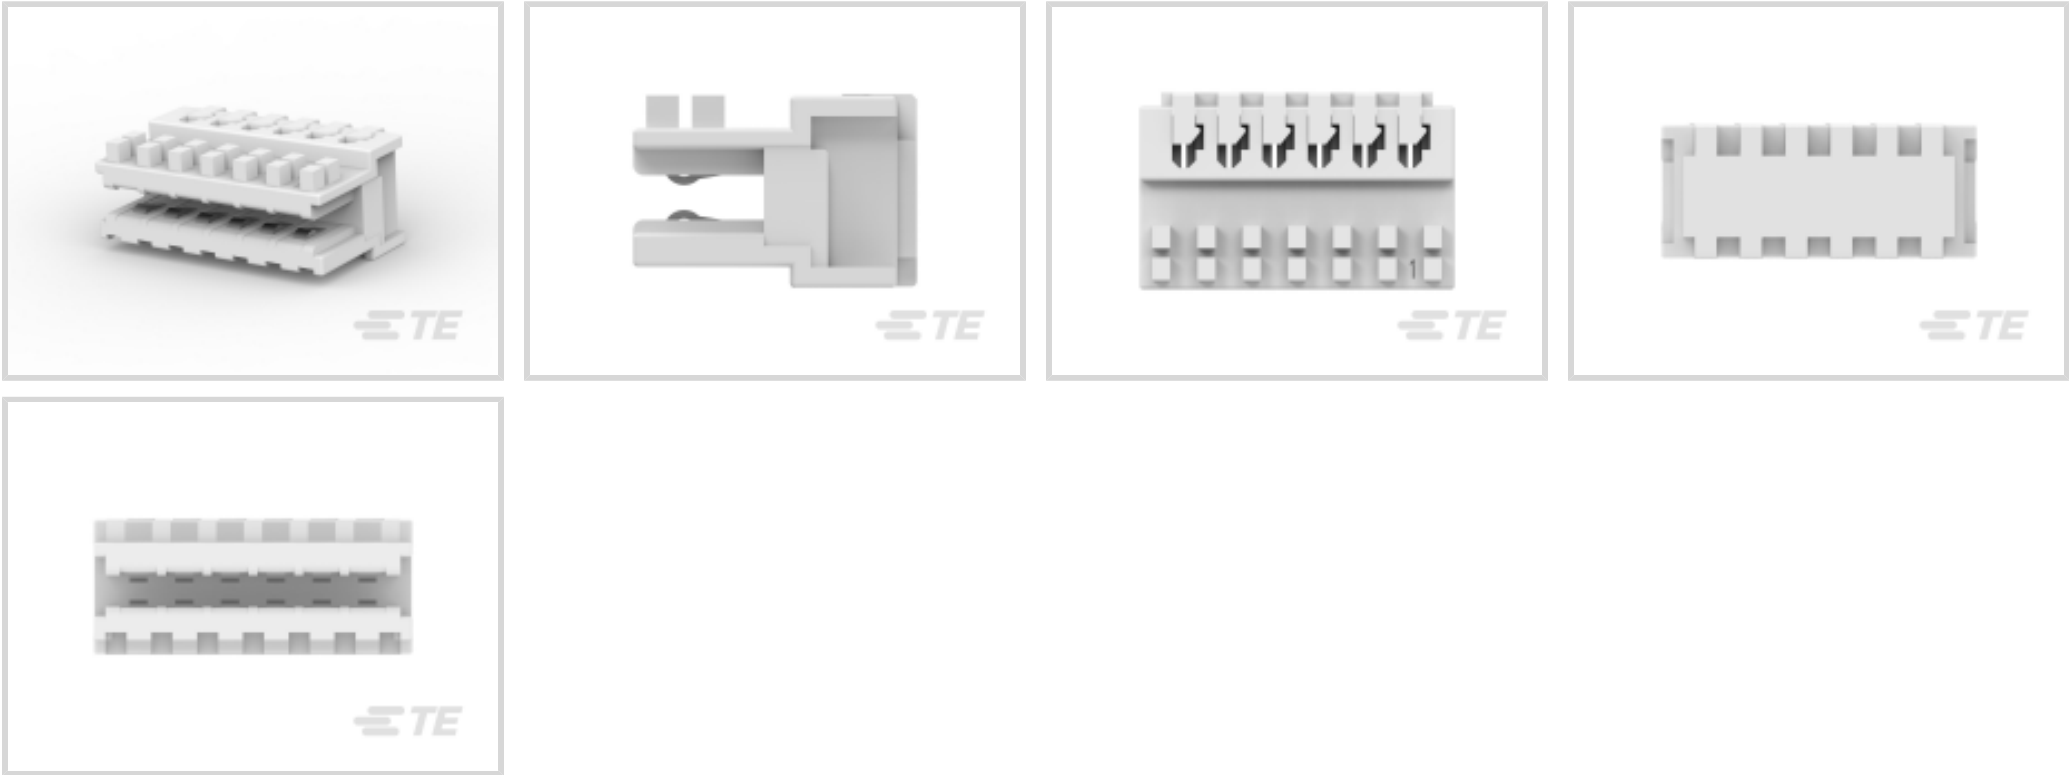

Connector System: **Wire-to-Board**

Number of Positions: **6**

Centerline (Pitch): **2.5 mm [.098 in]**

Termination Method to Wire & Cable: **Insulation Displacement (IDC)**

Number of Rows: **1**

Features

Product Type Features

Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Card Entry Style	Side
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	6
Number of Rows	1
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle

Electrical Characteristics

Operating Voltage	63 VAC
-------------------	--------

Contact Features

PCB Contact Termination Area Plating Material Thickness	4 – 10 µm
Contact Mating Area Plating Material	Tin (Sn)

Contact Retention Within Housing	Without
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Type	Socket
Contact Current Rating (Max)	2 A

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Housing Entry Configuration	Both Ends Open
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBT GF

Dimensions

Card Slot Depth	5 mm
PCB Thickness (Recommended)	1.5 mm[.059 in]
Compatible Insulation Diameter Range	1.3 mm[.05 in]
Connector Height	7.35 mm
Wire Size	24 – 22 AWG

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Tray
Packaging Quantity	280

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)



Candidate List Declared Against: JAN 2024
(240)

Does not contain REACH SVHC

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-2304525-6 AMP DUOPLUG MK2 CONNECTOR 6P	 TE Part # 284932-6 DUOPLUG MKI, KEYED 2/3, 6 POS, RED	 TE Part # 284930-4 DUOPLUG Standard, female conn.	 TE Part # 284930-8 DUOPLUG Standard, female conn.
 TE Part # 2-284932-4 DUOPLUG MKI STD,KEYED 3/4,4 POS, BLACK	 TE Part # 1-284932-0 DUOPLUG STD 10 POS POL FULLY LOADED	 TE Part # 3-284932-3 DUOPLUG MKI STD, KEYED 2/3, 3 POS., RED	 TE Part # 284930-3 DUOPLUG Standard, female conn.
 TE Part # 284930-5 DUOPLUG Standard, female conn.	 TE Part # 284932-3 DUOPLUG Standard, female conn.	 TE Part # 2-284932-8 DUOPLUG MKI STD,KEYED 2/3,8 POS, ORANGE	 TE Part # 2402726-6 Same as 284930-6 w/ alternative resin



Customers Also Bought



TE Part #1-282046-1
AMP MONO-SHAPE P.C.B.CONN6P.
GL




TE Part #926647-8
UMNL CAP HSG. 15 POS



TE Part #175022-1
250 PL EX REC. 18-14AWG PTBR



TE Part #1-282003-6
AMP MONO-SHAPE TAB CONN

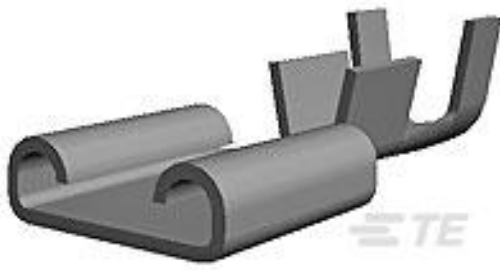

TE Part #280001-9
250 FASTON,REC.,14-17 AWG,TPBR




TE Part #293207-3
DUOPLUG Std conn.,3 pos,gwt750 v0



TE Part #284930-3
DUOPLUG Standard, female conn.



TE Part #284970-3
Duoplug Std 3 pos. reinf. cover

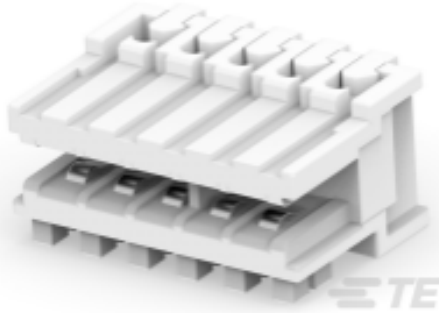

TE Part #2-284932-5
DUOPLUG STD FEMALE CONN., 5
POS.



TE Part #1-284931-0
DUOPLUG STD 10 POS POL sel
LOADED

Documents

Product Drawings

DUOPLUG Standard, female conn.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_284930-6_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_284930-6_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_284930-6_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages
RAST Connector System Catalog

English

Product Specifications
Application Specification

English

Agency Approvals
Agency Approval Document

English