




MTA 100

TE Internal #: 3-641216-3

PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold (Au), Through Hole - Solder, MTA 100

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > PCB Header: Polyester, Right Angle, Unshrouded

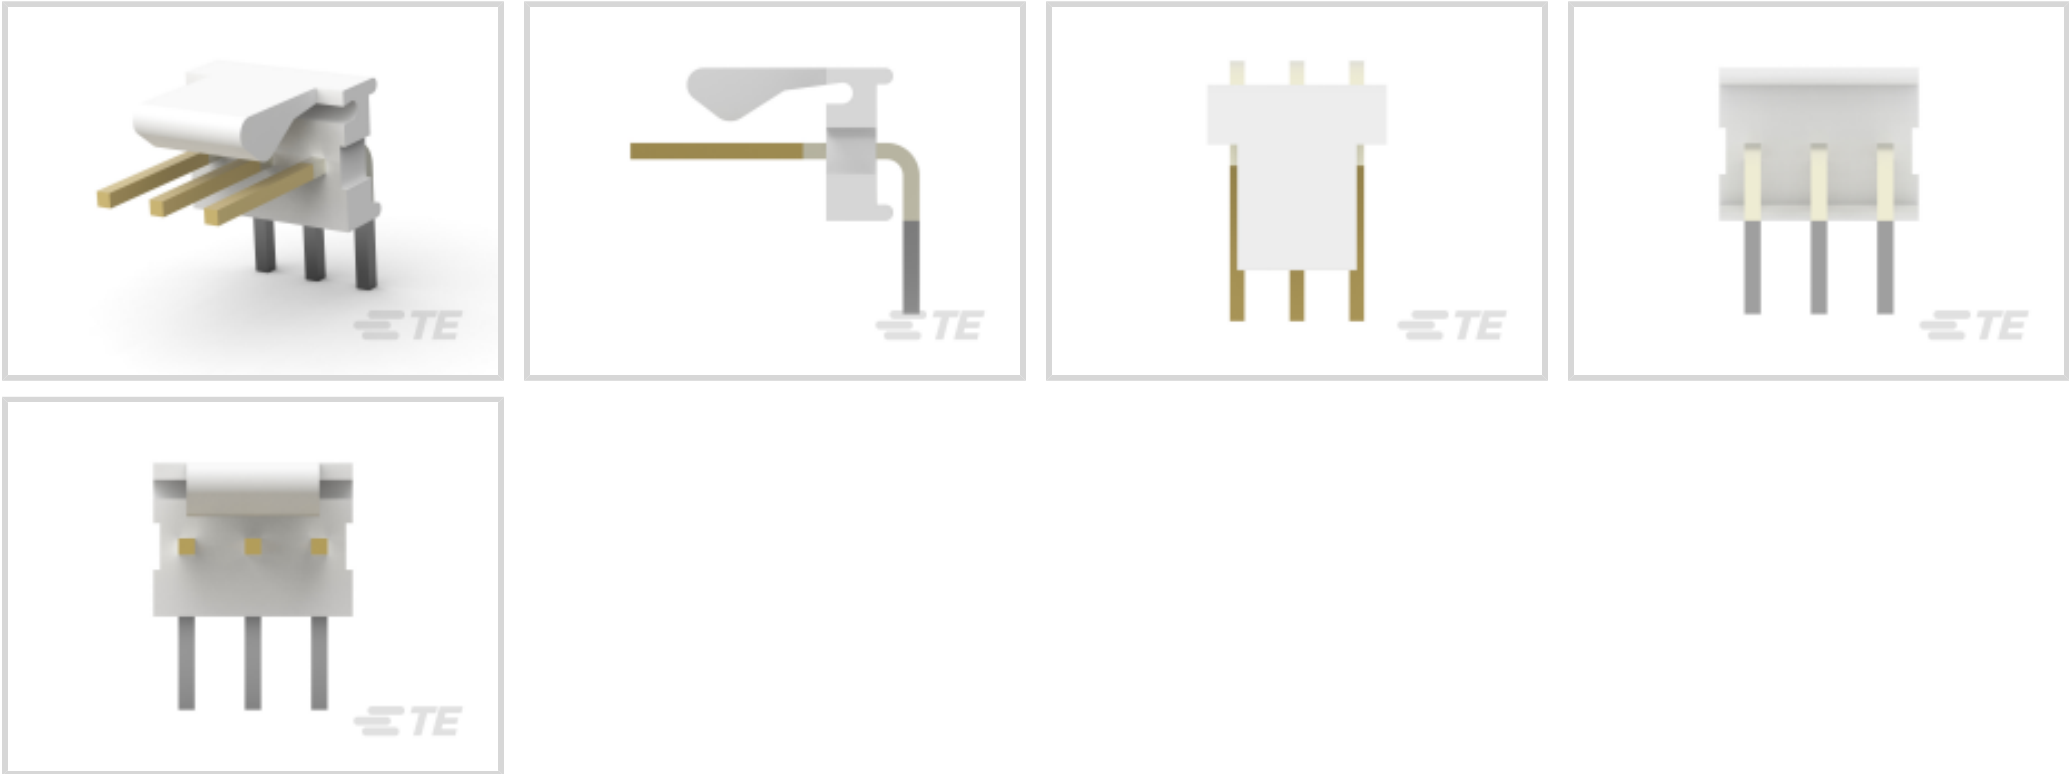

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Number of Rows: **1**

[All PCB Header: Polyester, Right Angle, Unshrouded \(80\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Type                | PCB Mount Header      |
| Connector System                  | Wire-to-Board         |
| Header Type                       | Partially Shrouded    |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector Product Type            | Connector Assembly    |

Configuration Features

|                       |             |
|-----------------------|-------------|
| PCB Mount Orientation | Right Angle |
| Number of Positions   | 3           |
| Number of Rows        | 1           |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|



Body Features

|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

|                                                         |                               |
|---------------------------------------------------------|-------------------------------|
| Contact Underplating Material                           | Nickel                        |
| Contact Underplating Material Thickness                 | 1.27 µm[50 µin]               |
| PCB Contact Termination Area Plating Material Finish    | Matte                         |
| Contact Mating Area Plating Material Thickness          | .76 µm[29.92 µin]             |
| Mating Square Post Dimension                            | .64 mm[.025 in]               |
| PCB Contact Termination Area Plating Material Thickness | 3.81 – 8.89 µm[150 – 350 µin] |
| Contact Shape & Form                                    | Square                        |
| Contact Layout                                          | Inline                        |
| Contact Mating Area Length                              | 7.49 mm[.295 in]              |
| Contact Base Material                                   | Copper Alloy                  |
| PCB Contact Termination Area Plating Material           | Tin                           |
| Contact Mating Area Plating Material Finish             | Bright                        |
| Contact Mating Area Plating Material                    | Gold (Au)                     |
| Contact Type                                            | Pin                           |
| Contact Current Rating (Max)                            | 5 A                           |

Termination Features

|                                          |                       |
|------------------------------------------|-----------------------|
| Termination Post & Tail Length           | 3.56 mm[.14 in]       |
| Square Termination Post & Tail Dimension | .64 mm[.025 in]       |
| Termination Method to PCB                | Through Hole - Solder |

Mechanical Attachment

|                         |               |
|-------------------------|---------------|
| Panel Mount Feature     | Without       |
| Mating Retention Type   | Friction Lock |
| Mating Retention        | With          |
| Mating Alignment Type   | Polarization  |
| PCB Mount Retention     | Without       |
| PCB Mount Alignment     | Without       |
| Connector Mounting Type | Board Mount   |
| Mating Alignment        | With          |

Housing Features

|  |  |
|--|--|
|  |  |
|--|--|



|                          |                |
|--------------------------|----------------|
| Housing Material         | Polyester GF   |
| Right Angle Bending Side | Front          |
| Centerline (Pitch)       | 2.54 mm[.1 in] |

Dimensions

|                             |                 |
|-----------------------------|-----------------|
| PCB Thickness (Recommended) | 1.6 mm[.063 in] |
| Connector Height            | 7.87 mm[.31 in] |
| Connector Length            | 10.16 mm[.4 in] |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                                             |                       |
|---------------------------------------------|-----------------------|
| Compatible With Agency/Standards Products   | CSA, UL               |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating                      | UL 94V-0              |

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 1       |
| Packaging Method   | Package |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                 |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                   |

Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-104MTA-NGPMR  
Nylon Gold Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

TE Part # CAT-104MTA-NYLCC  
Nylon PCB Connector Covers: 2.54 mm, MTA 100

TE Part # CAT-104MTA-NGPNR  
Nylon Gold Plated Receptacle: 2.54 mm, no Mating Alignment

TE Part # 1375820-3  
CST-100 II HOUSING 3 POS

TE Part # CAT-104MTA-PLSCC  
Polyester PCB Connector Covers: 2.54 mm, MTA 100


Also in the Series | MTA 100

Connector Caps & Covers(69)

Connector Contacts(8)

Connector Hardware(1)

Insertion & Extraction Tools(2)

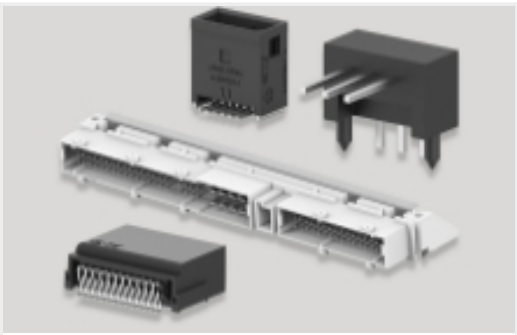


PCB Headers & Receptacles(441)



Rectangular Connector Housings(1)



Rectangular Power Connectors(1)

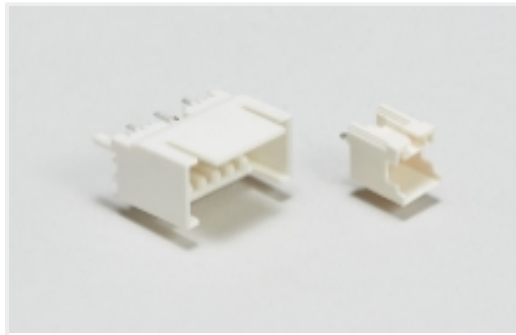


Wire-to-Board Headers & Receptacles (441)

Customers Also Bought




TE Part #3-641216-6  
06P MTA100 HDR ASSY FL/RA LF

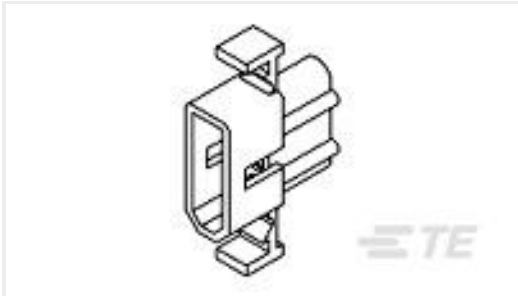


TE Part #770334-1  
04P .062 COMM P&S PLUG



TE Part #969973-7  
2x7P HV100 REC. CON, SMD, GOLD, BLISTER

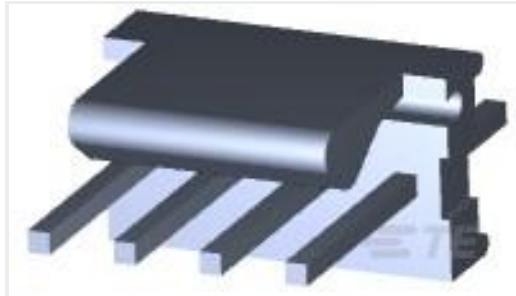


TE Part #641215-4  
04P MTA100 HDR ASSY FL/ST 30AU

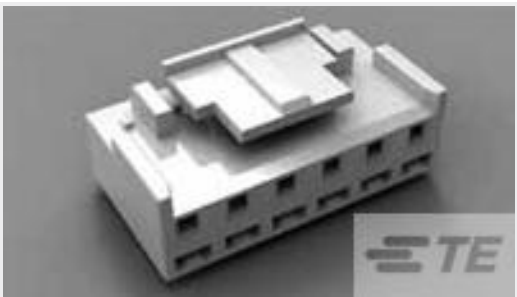


TE Part #1-1123722-9  
3.96 EP PLUG HSG 9P(NATURAL)



TE Part #1-2176088-3  
RP 1J 0.166W 1K0 0.1% 25PPM 1K RL

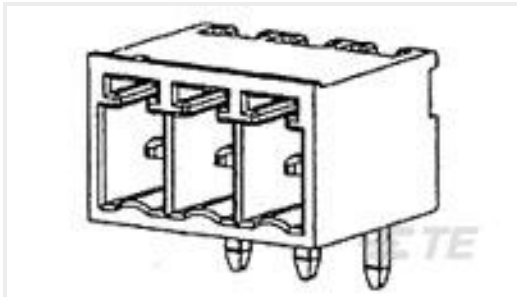

TE Part #284513-6  
6 POS TERMI-BLOK HDR 900 POL.

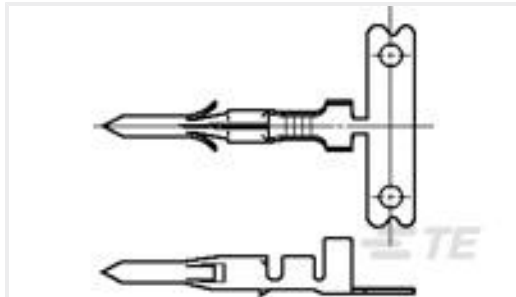

TE Part #794017-1  
.062 CP&S PIN PTPBR L/P 24-18



TE Part #796859-3  
3 POS TERMI-BLOK PLUG RT ANGLE



TE Part #2-1419130-8  
TSC-124L3H,000

Documents

Product Drawings

03P MTA100 HDR ASSY FL/RA LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-641216-3\_AC.2d\_dxf.zip





English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-641216-3\\_AC.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-641216-3\\_AC.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL](#)

English