




Connectors > PCB Connectors > PCB Headers & Receptacles

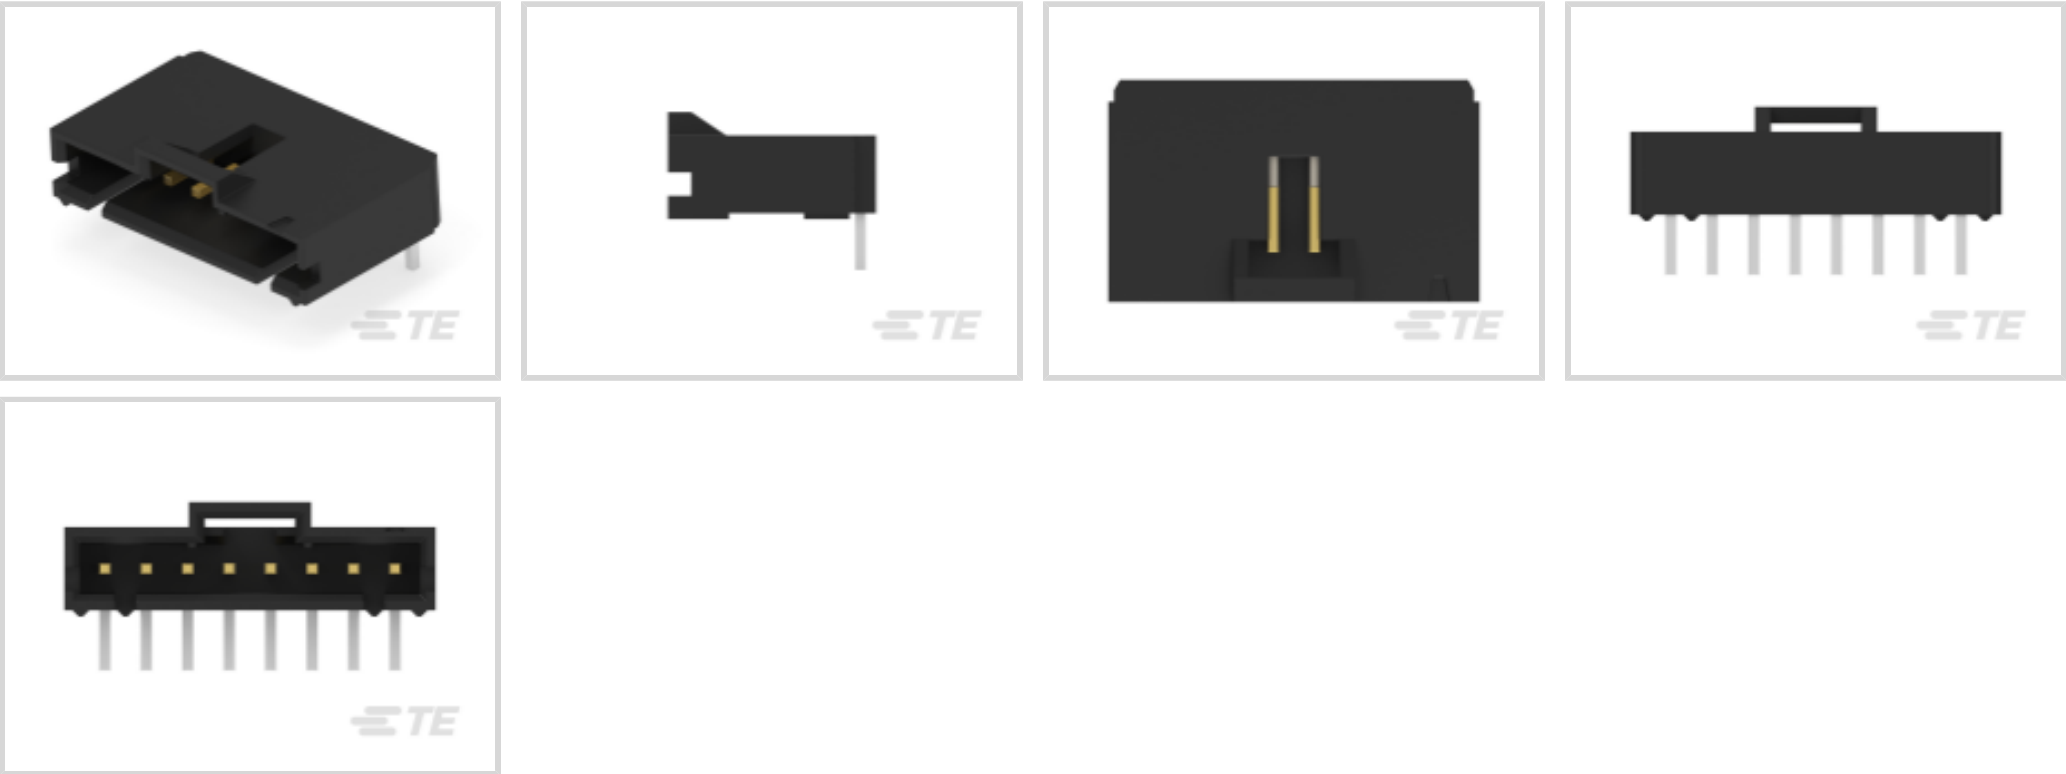

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **8**

Number of Rows: **1**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Type                | PCB Mount Header      |
| Connector System                  | Wire-to-Board         |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector Product Type            | Connector Assembly    |

Configuration Features

|                       |             |
|-----------------------|-------------|
| PCB Mount Orientation | Right Angle |
| Number of Positions   | 8           |
| Number of Rows        | 1           |

Electrical Characteristics

|                                       |         |
|---------------------------------------|---------|
| Termination Resistance                | 15 mΩ   |
| Insulation Resistance                 | 5000 MΩ |
| Dielectric Withstanding Voltage (Max) | 600 V   |



Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

|                                                         |                  |
|---------------------------------------------------------|------------------|
| PCB Contact Termination Area Plating Material Finish    | Matte            |
| Contact Mating Area Plating Material Thickness          | .381 μm[15 μin]  |
| Mating Square Post Dimension                            | .64 mm[.025 in]  |
| PCB Contact Termination Area Plating Material Thickness | 2.54 μm[100 μin] |
| Contact Shape & Form                                    | Square           |
| Contact Mating Area Length                              | 5.84 mm[.23 in]  |
| Contact Base Material                                   | Brass            |
| PCB Contact Termination Area Plating Material           | Tin              |
| Contact Mating Area Plating Material                    | Gold (Au)        |
| Contact Type                                            | Pin              |
| Contact Current Rating (Max)                            | 3 A              |

Termination Features

|                                          |                       |
|------------------------------------------|-----------------------|
| Termination Post & Tail Length           | 3.3 mm[.13 in]        |
| Square Termination Post & Tail Dimension | .64 mm[.025 in]       |
| Termination Method to PCB                | Through Hole - Solder |

Mechanical Attachment

|                         |                       |
|-------------------------|-----------------------|
| Mating Retention Type   | Polarized Lock        |
| Mating Retention        | With                  |
| Mating Alignment Type   | Latched, Polarization |
| PCB Mount Retention     | Without               |
| PCB Mount Alignment     | Without               |
| Connector Mounting Type | Board Mount           |
| Mating Alignment        | With                  |

Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | Thermoplastic  |
| Centerline (Pitch) | 2.54 mm[.1 in] |

Dimensions

|                             |                  |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
| Connector Height            | 6.99 mm[.275 in] |



|                  |                 |
|------------------|-----------------|
| Connector Length | 22.86 mm[.9 in] |
|------------------|-----------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                                             |                       |
|---------------------------------------------|-----------------------|
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating                      | UL 94V-0              |

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 23        |
| Packaging Method   | Box, Tube |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Reflow solder capable to 260°C                                                                                                |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 487526-7  
008 HOUSING FFC RCPT 100CL SR

TE Part # 5-103957-7  
2X8 MTE RCPT SR LATCH .100CL

TE Part # 5-103960-7  
2X8 MTE RCPT SR LATCH .100CL

Also in the Series | AMPMODU MTE

Board-to-Board Headers & Receptacles(24)

Connector Caps & Covers(18)

Connector Contacts(27)

Connector Hardware(1)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(444)

Wire-to-Board Connector Assemblies & Housings(298)

Wire-to-Board Headers & Receptacles (420)


Customers Also Bought

TE Part #5-103635-1  
02 MTE HDR SRRA LTCH.100CL LF


TE Part #1-1977223-0  
FSM4JSMASR=6MM TACT SWITCH, SMT 160gf,

TE Part #2-644861-2  
02P MTA100 SHRD HDR,W/O PEG SN

TE Part #1462042-6  
IMC06TS=IM RELAY 140mW 12V 1CO

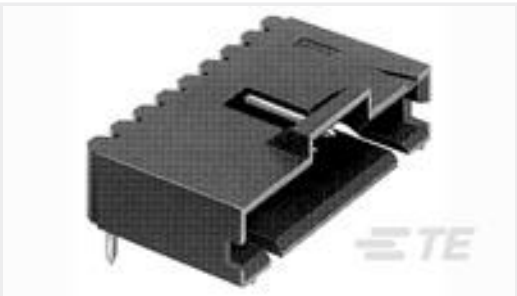


TE Part #5-103635-2  
[03 MTE HDR SRRA LTCH.100CL LF](#)

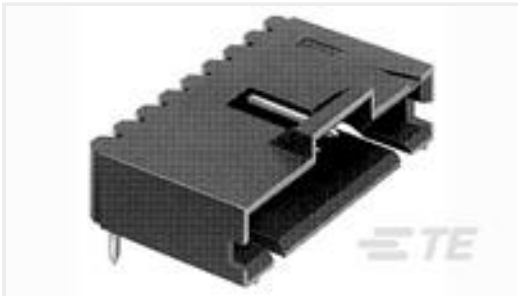

TE Part #5-103634-1  
[02 MTE HDR SRRA LATCH.100CL LF](#)



TE Part #5-103669-7  
[08 MTE HDR SRST LATCH W/HLDWN](#)

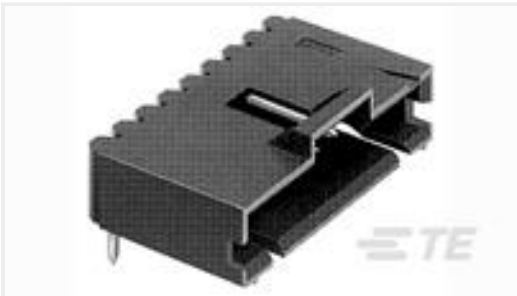

TE Part #5-103635-4  
[05 MTE HDR SRRA LTCH.100CL LF](#)



TE Part #487526-7  
[008 HOUSING FFC RCPT 100CL SR](#)



TE Part #5-104362-7  
[08 MTE HDR SRST LATCH W/HLDWN](#)

Documents

Product Drawings

[08 MTE HDR SRRA LTCH.100CL LF](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5-103635-7\\_U.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-103635-7\\_U.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-103635-7\\_U.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPMODU\\_INTERCONNECTION\\_SYSTEM\\_SECTION5\\_CONT](#)

English

[AMPMODU MTE INTERCONNECT SYSTEM](#)

English

Product Specifications

[Application Specification](#)

English

5-103635-7

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2.54 mm [.1 in]  
Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, AMPMODU MTE

