

2325347-4 ✓ ACTIVE

Power Versa-Lock | Power Versa-Lock 5.0

TE Internal #: 2325347-4


Interface Seal, -30 – 140 °C [-22 – 284 °F], Blue, Silicone Rubber, 4

Position, Power Versa-Lock 5.0

[View on TE.com >](#)



Connectors > Connector Accessories > Connector Seals & Cavity Plugs

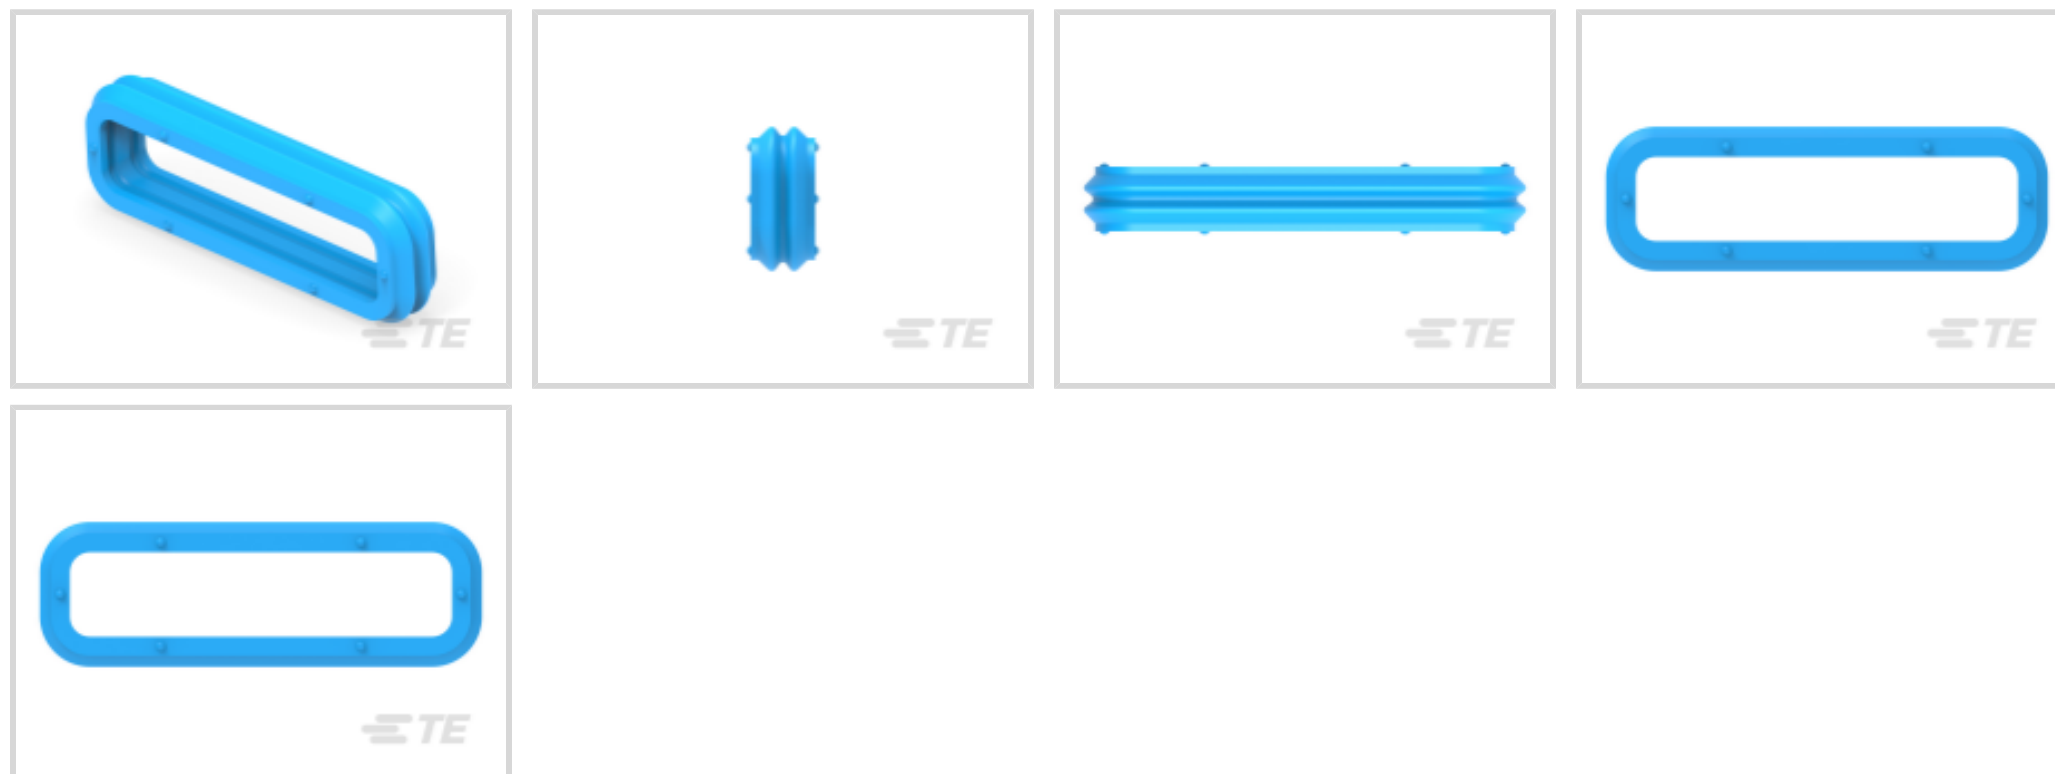

Connector Seal & Plug Type: **Interface Seal**

Operating Temperature Range: **-30 – 140 °C [-22 – 284 °F]**

Primary Product Color: **Blue**

Primary Product Material: **Silicone Rubber**

Operating Temperature (Max): **140 °C [284 °F]**

Features

Product Type Features

Connector Seal & Plug Type	Interface Seal
----------------------------	----------------

Configuration Features

Number of Positions	4
---------------------	---

Body Features

Primary Product Color	Blue
Primary Product Material	Silicone Rubber

Usage Conditions

Operating Temperature Range	-30 – 140 °C[-22 – 284 °F]
Operating Temperature (Max)	140 °C[284 °F]

Packaging Features

Packaging Method	Bag
Packaging Quantity	500

Product Compliance



[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27520038512) Decamethylcyclopentasiloxane (D5) (.5% in 27520038512) Octamethylcyclotetrasiloxane (D4) (.5% in 27520038512)</p> <p>Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability







Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts




Also in the Series | **Power Versa-Lock 5.0**

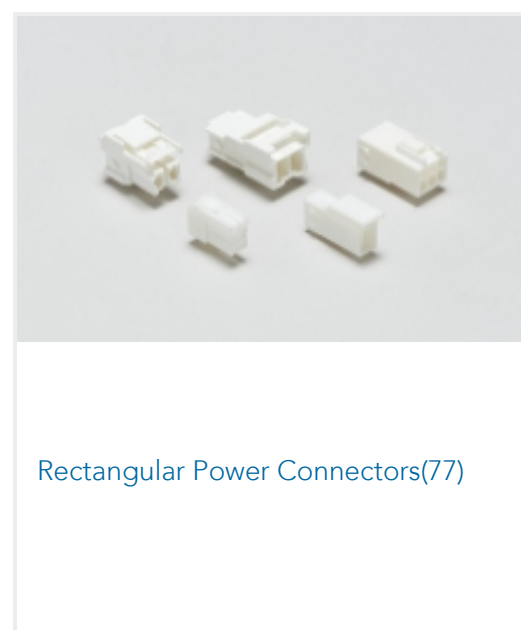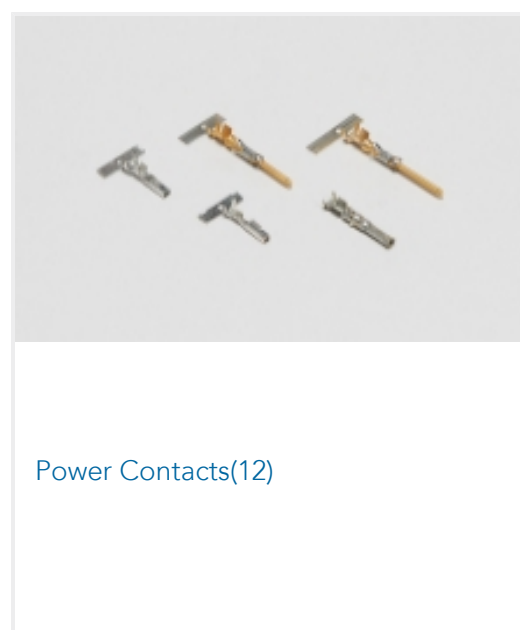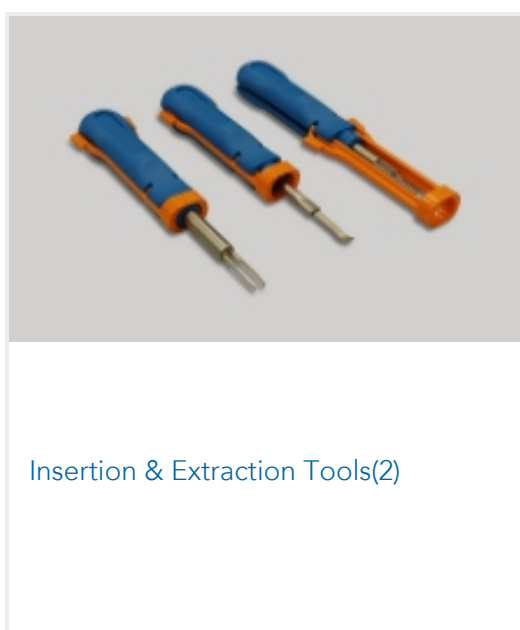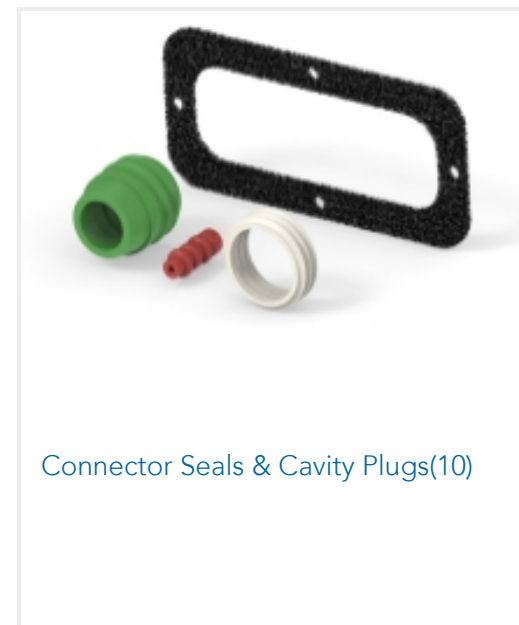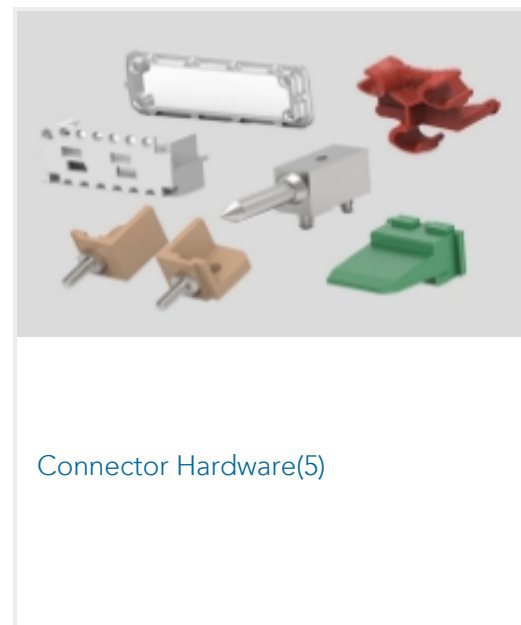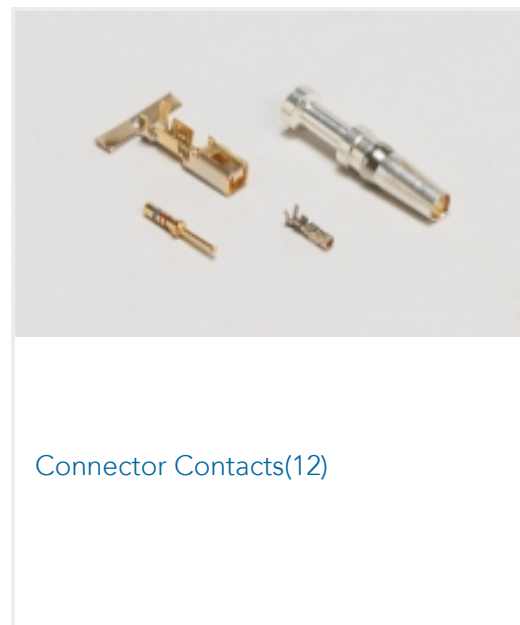

Customers Also Bought



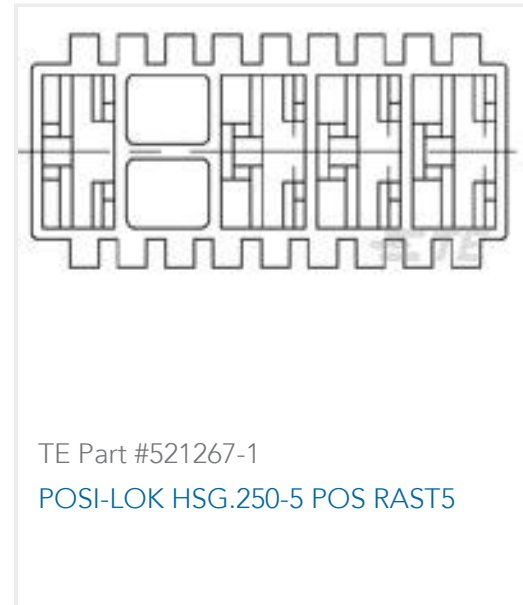

Documents

Product Drawings

POWER VERSA-LOCK, INTERFACE SEAL, 1X4

English

CAD Files

Customer View Model

[ENG_CVM_CVM_2325347-4_A.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2325347-4_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2325347-4_A.3d_igs.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English