

5-338310-2 ✓ ACTIVE

AMPLIMITE | AMPLIMITE HDP-20


TE Internal #: 5-338310-2

15 Position D-Shaped Connector, Plug, Cable-to-Board, Board Mount, 2 Shell Size, 2.74 mm [.108 in] Centerline, Printed Circuit Board, AMPLIMITE HDP-20

[View on TE.com >](#)



Connectors > D-Shaped Connectors > D-Sub Plug Assembly: Standard, Vertical, Shell Size 2, 2.74mm

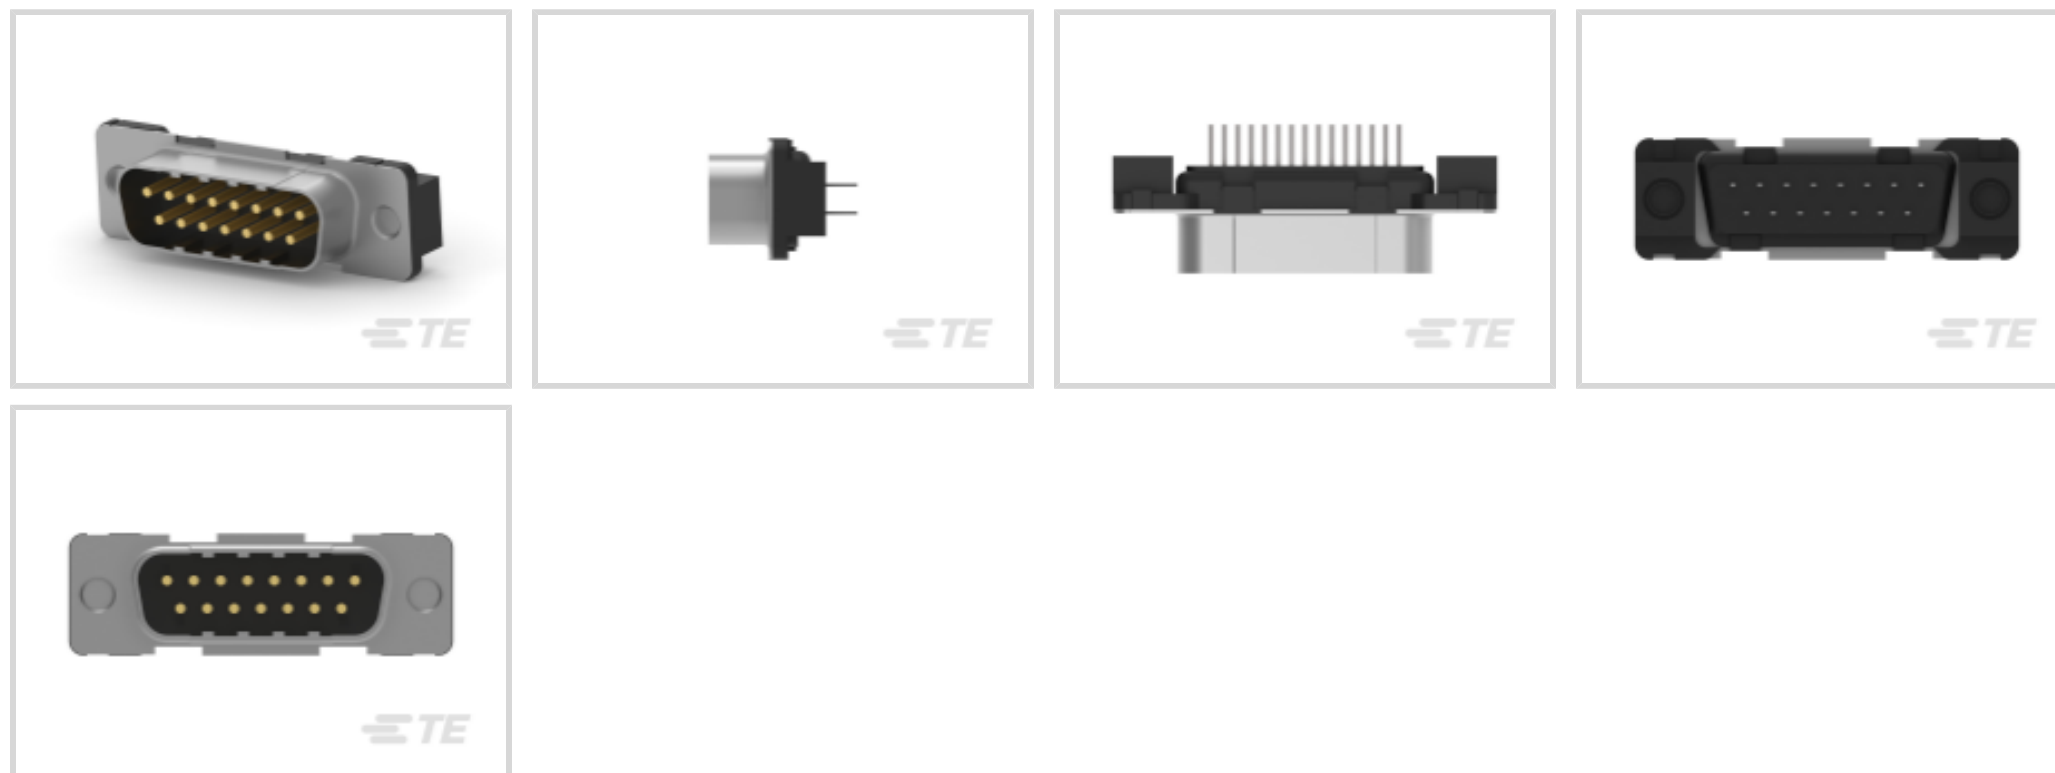

Number of Positions: 15

Connector & Housing Type: Plug

Connector System: Cable-to-Board

Connector Mounting Type: Board Mount

Connector Shell Size: 2

[All D-Sub Plug Assembly: Standard, Vertical, Shell Size 2, 2.74mm \(18\)](#)

## Features

### Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Plug
Connector System	Cable-to-Board
Connector Shell Size	2
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

PCB Mount Orientation	Vertical
Number of Rows	2
Number of Positions	15

### Body Features

Assembly Process Feature Material	Phosphor Bronze
Shell Plating Material	Tin



Primary Product Color	Black
-----------------------	-------

Connector Profile	Standard
-------------------	----------

### Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

30 µin

Contact Shape & Form	Round
----------------------	-------

Contact Mating Area Plating Material	Gold (Au)
--------------------------------------	-----------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

PCB Contact Termination Area Plating Material	Tin
---	-----

Contact Current Rating (Max)	6 A
------------------------------	-----

Contact Options	Installed
-----------------	-----------

### Termination Features

Rectangular Termination Post & Tail Width	.45 mm[.017 in]
---	-----------------

Rectangular Termination Post & Tail Thickness	.32 mm[.012 in]
---	-----------------

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Termination Post & Tail Length	3.2 mm[.126 in]
--------------------------------	-----------------

### Mechanical Attachment

Mating Retention Type	Threaded Insert, 4-40 UNC
-----------------------	---------------------------

PCB Mount Retention	With
---------------------	------

Mounting Hole Diameter	5 mm
------------------------	------

Mating Retention	Without
------------------	---------

PCB Mount Retention Type	Mounting Hole
--------------------------	---------------

Assembly Process Feature Plating Material	Tin
---	-----

Connector Mounting Type	Board Mount
-------------------------	-------------

### Housing Features

Housing Material	Polyester GF
------------------	--------------

Shell Material	Steel
----------------	-------

Centerline (Pitch)	2.74 mm[.108 in]
--------------------	------------------

### Dimensions

Row-to-Row Spacing	2.84 mm[.112 in]
--------------------	------------------

PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

### Usage Conditions



Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

**Operation/Application**

Durability Rating	200 Cycles
Shielded	No
Circuit Application	Signal

**Industry Standards**

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	DIN 41652

**Packaging Features**

Packaging Quantity	45
Packaging Method	Tray

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (.35% in 74025572) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


**Product Compliance Disclaimer**

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Also in the Series | AMPLIMITE HDP-20

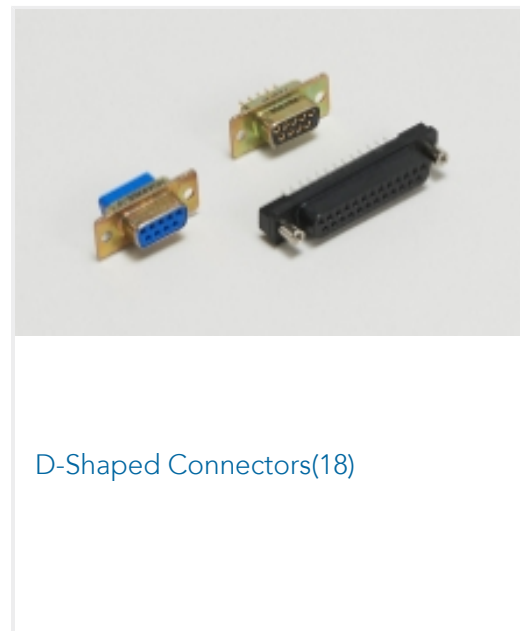

## Customers Also Bought





## Documents

### Product Drawings

[15POS.HD20 PLUG ASS'Y](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_5-338310-2\\_D.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5-338310-2\\_D.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-338310-2\\_D.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Product Specification](#)

English